

Rotor 8

- [Français](#)
- [English](#)

Downloadable files

x

Open access

[Git project](#)

Original model

Rotor 8 is part of a research program to study the effects of blade row solidity on efficiency and stall margin of an axial-flow compressor rotor. It is one of a series of rotors designed to further study the effects of solidity : rotor 8 with a tip solidity of 1.5, rotor 12 with a tip solidity of 1.7 and rotor 14 with a tip solidity of 1.3. Tip solidity are being changed by varying the number of blades while maintaining the same velocity diagrams and flow path. These stages were designed such that the tip solidity of both the rotor and stator blades are the same.

- Original technical report [\[1\]](#):

```
@TechReport{osborn1973design,
  author      = {Osborn, Walter M. and Urasek, Donald C. and Moore,
R. D.},
  date        = {1973},
  institution = {NASA Lewis Research Center Cleveland, OH, United
States},
  title       = {Performance of a single-stage transonic compressor
with a blade-tip solidity of 1.5 and comparison with 1.3- and 1.7-solidity
stages},
  number      = {NASA-TM X-2926},
  url         = {https://ntrs.nasa.gov/citations/19740002621},
}
```

- Picture :

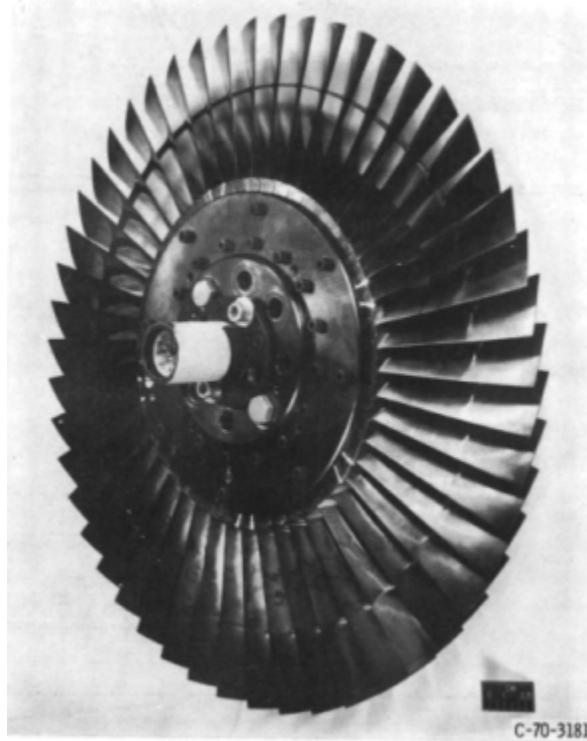


Fig1. <https://ntrs.nasa.gov/citations/19740002621> p.67

Useful documents

- [downloadable models](#) (Git project)
 - NASA technical report (.pdf)
 - geometrical parameters file (.csv), usable as input of OpenMCAD^[2] to generate reference blade models.

Reference blade

The **reference blade** is defined with multiple-circular arc profiles^[3] given in the original NASA report^[1]. Corresponding models are computed with the open-source code OpenMCAD^[2].

Geometry

The geometry of rotor 8 is described in the [original NASA report](#) by the following tables. The length are in centimeters and the angles in degrees.

TABLE IV. - BLADE GEOMETRY FOR ROTOR 8

RP	PERCENT SPAN	RADI R1	R0	BLADE ANGLES	DELTA	CONE ANGLE		
TIP	0.	25.082	24.701	K1C 62.92	60.67	52.34	2.49	-9.298
1	5.	24.568	24.193	K1C 61.67	59.64	51.79	2.72	-8.836
2	10.	24.021	23.685	K1C 60.41	58.45	51.04	2.98	-7.644
3	30.	21.754	21.653	K1C 55.93	52.88	46.27	4.06	-1.996
4	43.	20.287	20.383	K1C 53.47	49.55	41.81	4.74	1.771
5	45.	19.989	20.129	K1C 52.99	48.87	40.74	4.88	2.542
6	48.	19.690	19.875	K1C 52.52	48.23	39.60	5.01	3.325
7	50.	19.388	19.621	K1C 52.06	47.59	38.38	5.15	4.114
8	53.	19.085	19.367	K1C 51.60	46.97	37.09	5.28	4.908
9	70.	16.891	17.589	K1C 48.50	42.58	26.07	6.19	10.851
10	90.	14.175	15.557	K1C 45.39	39.25	6.42	7.05	18.759
11	95.	13.447	15.049	K1C 44.77	38.97	-0.40	7.20	20.972
HUB	100.	12.700	14.541	K1C 44.22	38.93	-7.94	7.52	23.205

RP	BLADE THICKNESSES			AXIAL DIMENSIONS			
	T1	TM	T0	Z1C	ZMC	ZTC	ZOC
TIP	0.051	0.152	0.051	1.020	2.104	2.330	3.347
1	0.051	0.162	0.051	0.970	2.098	2.290	3.379
2	0.051	0.172	0.051	0.918	2.094	2.246	3.417
3	0.051	0.216	0.051	0.723	2.082	2.039	3.598
4	0.051	0.244	0.051	0.609	2.072	1.879	3.715
5	0.051	0.250	0.051	0.586	2.069	1.844	3.739
6	0.051	0.256	0.051	0.564	2.066	1.808	3.764
7	0.051	0.262	0.051	0.542	2.063	1.772	3.789
8	0.051	0.267	0.051	0.519	2.060	1.734	3.815
9	0.051	0.309	0.051	0.354	2.032	1.439	4.000
10	0.051	0.359	0.051	0.158	1.977	1.037	4.208
11	0.051	0.373	0.051	0.071	1.958	0.920	4.253
HUB	0.051	0.387	0.051	0.000	1.935	0.797	4.295

Aerodynamic design

	unit	values
pressure ratio	[-]	1.75
mass flow	[kg/s]	29.5
tip speed	[m/s]	423
tip solidity	[-]	1.5
aspect ratio	[-]	2.4
number of blades	[-]	49
rotative speed	[rad/s]	1686

Material properties

The material of rotor 8 is not defined in the original NASA report. A generic titanium Ti-6Al-4V is considered:


	unité	valeurs
alloy	[-]	Ti-6Al-4V
Young's modulus	[GPa]	108
density	[kg/m ³]	4400
Poisson's ratio	[-]	0.34
yield stress	[GPa]	0.824

CAD model

The CAD model is computed with the open source code OpenMCAD^[2].



pressure side

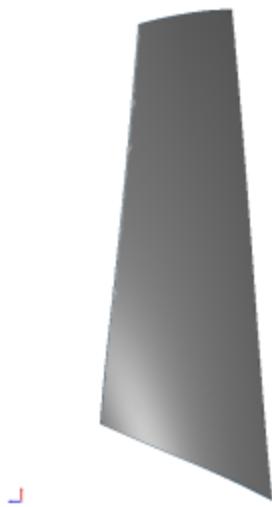

suction side

Natural frequencies

First three natural frequencies (with clamped root) for the mesh computed with OpenMCAD^[2]:

Mode	Type	Natural angular frequency (rad/sec)	Natural frequency (Hz)
1	1B	1779.57	283.228
2	2B	6407.97	1019.86
3	1T	8746.82	1392.1

Initial blade

The **initial blade** is defined with in-house LAVA parameters^[4] computed from the reference blade CAD model. The initial blade is usually used as starting point for an optimization process. Its geometry is

similar to the one of the reference blade.

Natural frequencies

First three natural frequencies (with clamped root)

- from the whole mesh:

Mode	Type	Natural angular frequency (rad/sec)	Natural frequency (Hz)
1	1B	1778.69	283.088
2	2B	6413.56	1020.75
3	1T	8747.83	1392.26

- from the reduced order model:

Mode	Type	Natural angular frequency (rad/sec)	Natural frequency (Hz)
1	1B	1778.75	283.098
2	2B	6416.20	1021.17
3	1T	8750.91	1392.75

Fichiers téléchargeables

x

Libre accès

[lien vers le projet Git](#)

À propos

Le rotor 8 fait partie d'un programme de recherche visant à étudier les effets de la solidité des rangées d'aubes sur l'efficacité et la marge de décrochage d'un rotor de compresseur à flux axial. Il fait partie d'une série de rotors conçus pour étudier plus profondément les effets de la solidité : le rotor 8 avec une solidité en tête de 1.5, le rotor 12 avec une solidité en tête de 1.7 et le rotor 14 avec une solidité en tête de 1.3. La solidité est modifiée en faisant varier le nombre d'aubes tout en conservant les mêmes triangles de vitesse et le même trajet d'écoulement. Ces étages ont été conçus de manière à ce que la solidité en tête du rotor et du stator soit la même.

- Rapport technique original ^[1]:

```
@TechReport{osborn1973design,
  author      = {Osborn, Walter M. and Urasek, Donald C. and Moore,
R. D.},
  date        = {1973},
  institution = {NASA Lewis Research Center Cleveland, OH, United
States},
  title       = {Performance of a single-stage transonic compressor
with a blade-tip solidity of 1.5 and comparison with 1.3- and 1.7-solidity
stages},
  number      = {NASA-TM X-2926},
```

```
url = {https://ntrs.nasa.gov/citations/19740002621},  
}
```

- Photographie :

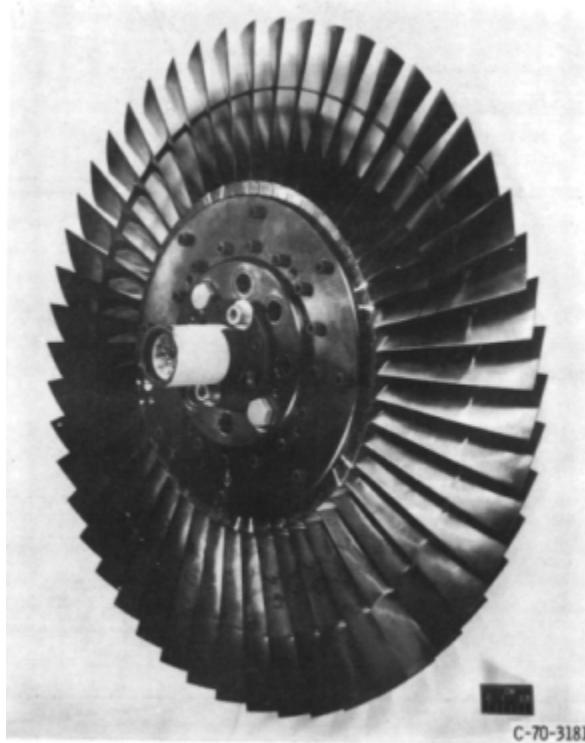


Fig1. <https://ntrs.nasa.gov/citations/19740002621> p.67

Documents utiles

- modèles téléchargeables (lien vers projet Git)
 - rapport technique original de la NASA (.pdf)
 - fichier de paramètres géométriques (.csv), utilisable en entrée de OpenMCAD^[2] pour générer l'aube de référence

Aube de référence

L'**aube de référence** est définie par des profils de type arcs circulaires multiples^[3], donnés dans le rapport technique original de la NASA^[1]. Les modèles associés sont obtenus avec le code en libre accès OpenMCAD^[2].

Géométrie

La géométrie du rotor 8 est décrite dans le [rapport d'origine de la NASA](#) par les tableaux suivants. Les grandeurs sont en centimètres et en degrés.

TABLE IV. - BLADE GEOMETRY FOR ROTOR 8

RP TIP	PERCENT SPAN			RADII			BLADE ANGLES			DELTA INC	CONE ANGLE
	R1	R2	R3	K1C	K2C	K3C					
1	5. 24.568	24.193	61.67	59.64	51.79	2.49	-9.298				
2	10. 24.021	23.685	60.41	58.43	51.04	2.72	-8.836				
3	30. 21.754	21.653	55.93	52.88	46.27	2.98	-7.644				
4	43. 20.287	20.383	53.47	49.53	41.81	4.06	-1.996				
5	45. 19.989	20.129	52.99	48.87	40.74	4.74	1.771				
6	48. 19.690	19.875	52.52	48.23	39.60	4.88	2.542				
7	50. 19.388	19.621	52.06	47.59	38.58	5.01	3.325				
8	53. 19.085	19.367	51.60	46.97	37.09	5.15	4.114				
9	70. 16.891	17.589	48.50	42.58	26.07	6.19	10.851				
10	90. 14.175	15.557	45.39	39.25	6.42	7.05	18.759				
11	95. 13.447	15.049	44.77	38.97	-0.40	7.20	20.972				
HUB	100.	12.700	14.541	44.22	38.93	-7.94	7.32	23.205			

RP TIP	BLADE THICKNESSES			AXIAL DIMENSIONS			
	T1	TM	T0	Z1C	ZMC	ZTC	ZOC
1	0.051	0.152	0.051	1.020	2.104	2.330	3.347
2	0.051	0.162	0.051	0.970	2.098	2.290	3.379
3	0.051	0.172	0.051	0.918	2.094	2.246	3.417
4	0.051	0.216	0.051	0.723	2.082	2.039	3.598
5	0.051	0.244	0.051	0.609	2.072	1.879	3.715
6	0.051	0.250	0.051	0.586	2.069	1.844	3.739
7	0.051	0.256	0.051	0.564	2.066	1.808	3.764
8	0.051	0.262	0.051	0.542	2.063	1.772	3.789
9	0.051	0.267	0.051	0.519	2.060	1.734	3.815
10	0.051	0.309	0.051	0.354	2.032	1.439	4.000
11	0.051	0.359	0.051	0.158	1.977	1.037	4.208
HUB	0.051	0.373	0.051	0.071	1.958	0.920	4.253

Caractéristiques aérodynamiques

	unités	valeurs
taux de compression	[-]	1,75
débit massique	[kg/s]	29,5
vitesse en tête	[m/s]	423
solidité en tête	[-]	1,5
allongement	[-]	2,4
nombre d'aubes	[-]	49
vitesse de rotation	[rad/s]	1686

Propriétés matériau

Le matériau original du rotor 8 n'est pas défini dans le rapport de la NASA. Un alliage de titane Ti-6Al-4v est considéré:

	unité	valeurs


	unité	valeurs
alliage	[-]	Ti-6Al-4v
module d'Young	[GPa]	108
masse volumique	[kg/m3]	4400
coefficient de Poisson	[-]	0,34
limite élastique	[GPa]	0,824

Modèle CAO

Le modèle CAO est obtenu avec OpenMCAD^[2].



intrados

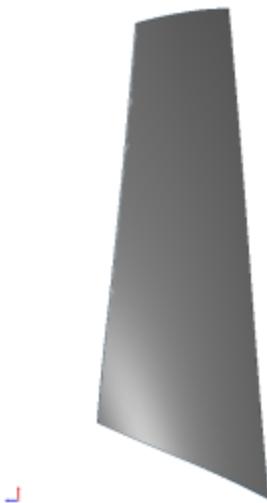

extrados

Fréquences propres

Fréquences des trois premiers modes (noeuds du pied d'aube encastrés) pour le maillage obtenu avec OpenMCAD^[2] :

Mode	Type	Pulsation propre (rad/sec)	Fréquence propre (Hz)
1	1F	1779,57	283,228
2	2F	6407,97	1019,86
3	1T	8746,82	1392,1

Aube initiale

L'**aube initiale** est définie par des paramètres spécifiques au LAVA^[4] obtenus à partir du modèle CAO de l'aube de référence. L'aube initiale est classiquement utilisée comme point de départ dans le cadre de procédures d'optimisation; sa géométrie est similaire à celle de l'aube de référence.

Fréquences propres

Fréquences des trois premiers modes (noeuds du pied d'aube encastrés),

- pour le maillage complet :

Mode	Type	Pulsation propre (rad/sec)	Fréquence propre (Hz)
1	1B	1778,69	283,088
2	2B	6413,56	1020,75
3	1T	8747,83	1392,26

- pour le modèle réduit :

Mode	Type	Pulsation propre (rad/sec)	Fréquence propre (Hz)
1	1B	1778,75	283,098
2	2B	6416,20	1021,17
3	1T	8750,91	1392,75

1. [a](#), [b](#), [c](#), [d](#) Osborn. «Performance of a single-stage transonic compressor with a blade-tip solidity of 1.5 and comparison with 1.3- and 1.7-solidity stage » 1973. [pdf](#)
2. [a](#), [b](#), [c](#), [d](#), [e](#), [f](#), [g](#), [h](#) Kojtych S., Batailly A. «OpenMCAD, an open blade generator: from Multiple-Circular-Arc profiles to Computer-Aided Design model» 2022. [code en libre accès](#)
3. [a](#), [b](#) Crouse et al. «A computer program for composing compressor blading from simulated circular-arc elements on conical surfaces » 1969. NASA-TN-D-5437. [pdf](#)
4. [a](#), [b](#) Kojtych S. et al. «Methodology for the Redesign of Compressor Blades Undergoing Nonlinear Structural Interactions: Application to Blade-Tip/Casing Contacts » 2022. Journal of Engineering for Gas Turbines and Power, Vol. 145, No. 5. [pdf](#)

Document issu de la page wiki:

https://lava-wiki.meca.polymtl.ca/public/modeles/rotor_08/accueil?rev=1679272792

Dernière mise à jour: **2023/04/05 08:59**