

Rotor 37

- [Français](#)
- [English](#)

Downloadable files

x

Open access

[Git project](#)

About

Rotor 37 is part of a research program to study a advanced-core compressor design with a high compression ratio (20:1). It is therefore the third stage rotor of this eight stage transonic compressor. Of these eight stages, the first four have been designed and tested : rotors 35, 36, 37 and 38. For more information, here is a link to [a report from NASA](#).

- Original technical report [\[1\]](#):

```
@TechReport{moore1980design,
  author      = {Moore, R. D. and Reid, L.},
  date        = {1980},
  institution = {NASA Lewis Research Center Cleveland, OH, United States},
  title       = {Performance of Single-Stage Axial-Flow Transonic Compressor With Rotor and Stator Aspect Ratios of 1.19 and 1.26, Respectively, and With Design Pressure Ratio of 2.05},
  number      = {NASA-TP-1659},
  url         = {https://ntrs.nasa.gov/citations/19800012840},
```

- Pictures :

Fig. 1 <https://catalog.archives.gov/id/17468361>Fig. 2. <https://catalog.archives.gov/id/17468389>

```
• @Misc{huebler1977records,
  author = {Huebler, D.},
  title = {Rotor 37 and stator 37 assembly. {R}ecords of the {N}ational
    {A}eronautics and {S}pace {A}dministration, 1903 - 2006. {P}hotographs
    relating to agency activities, facilities and personnel, 1973 - 2013},
  note =
  {\url{https://catalog.archives.gov/id/17468361}}{\url{https://catalog.archives.
  gov/id/17468361}}, 1977 }, % for Fig. 1
  note =
  {\url{https://catalog.archives.gov/id/17468389}}{\url{https://catalog.archives.
  gov/id/17468389}}, 1977 }, % for Fig. 2}
```

Useful documents

- [downloadable models](#) (Git project)
 - NASA technical report (.pdf)
 - geometrical parameters file (.csv), usable as input of OpenMCAD^[2] to generate reference blade models.

Reference blade

The **reference blade** is defined with multiple-circular arc profiles^[3] given in the original NASA report^[1]. Corresponding models are computed with the open-source code OpenMCAD^[2].

Geometry

The geometry of rotor 37 is described in the [original NASA report](#) by the following tables. The length are in centimeters and the angles in degrees.

(a) Rotor 37											
RP TIP	PERCENT SPAN	RADII		BLADE ANGLES			DELTA		CONE		
		R _I	R _O	K _{IC}	K _{TC}	K _{OC}	INC	ANGLE			
1	0.	25.230	24.506	62.53	62.83	49.98	2.10	-15.233			
2	5.	24.935	24.218	61.66	61.86	49.07	2.39	-14.582			
3	10.	24.597	23.929	60.76	60.86	48.18	2.69	-13.139			
4	15.	24.254	23.641	60.07	60.09	47.34	2.94	-11.768			
5	20.	23.211	22.775	58.48	58.09	44.22	3.40	-7.804			
6	25.	21.761	21.622	56.53	54.49	38.87	4.19	-2.276			
7	30.	20.246	20.458	54.24	50.48	32.37	5.49	3.311			
8	35.	19.030	19.603	52.67	47.60	25.28	6.54	8.010			
9	40.	18.603	19.314	52.37	46.87	22.68	6.83	9.728			
HUB	100.	18.161	19.026	52.18	46.39	19.75	7.16	11.584			
		100.	17.780	18.738	52.04	46.03	16.75	7.44	12.602		

RP TIP	BLADE	THICKNESSES			AXIAL DIMENSIONS			Z0
		T _I	T _M	T _O	Z _I	Z _{MC}	Z _{TC}	
1	.025	.175	.025		.713	2.430	2.399	3.372
2	.026	.186	.026		.665	2.390	2.372	3.424
3	.028	.199	.028		.615	2.346	2.334	3.475
4	.029	.211	.029		.574	2.304	2.280	3.520
5	.032	.250	.033		.466	2.225	2.094	3.644
6	.037	.303	.038		.317	2.164	1.928	3.822
7	.042	.360	.043		.176	2.069	1.773	4.015
8	.047	.407	.047		.079	2.010	1.733	4.153
9	.048	.425	.049		.048	1.984	1.660	4.198
HUB	.051	.458	.051		.000	1.933	1.530	4.283

Aerodynamic design

	unit	value
pressure ratio	[-]	2.05
mass flow	[kg/s]	20.2
tip speed	[m/s]	455
tip solidity	[-]	1.3
aspect ratio	[-]	1.19
number of blades	[-]	36
nominal rotation speed ω_n [rad/s]		1800


Material properties

Rotor 37 is made of a 200-grade maraging steel^[4], but the exact material properties are not provided in the NASA report. The following properties are considered:


	unit	value
alloy	[-]	18-Ni-200-maraging
Young's modulus	[GPa]	180
density	[kg/m3]	8000
Poisson's ratio	[-]	0.3
yield stress	[GPa]	1.38

CAD model

The CAD model is computed with the open source code OpenMCAD^[2].

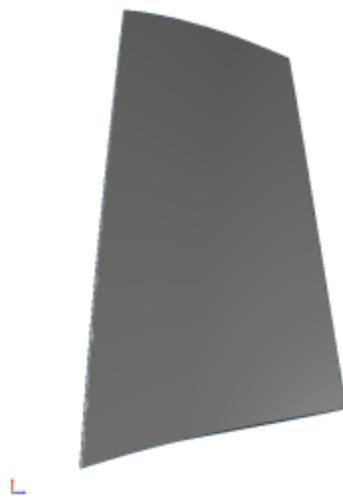

pressure side

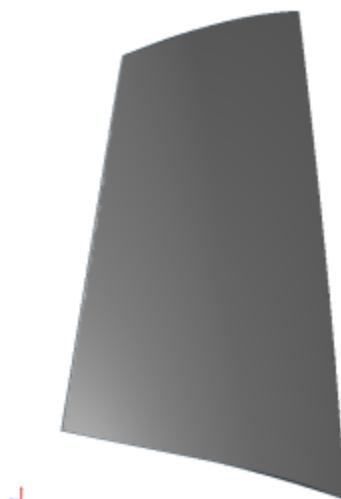

suction side


Natural frequencies

First three natural frequencies (with clamped root) for the mesh computed with OpenMCAD^[2]:

Mode	Type	Natural angular frequency (rad/sec)	Natural frequency (Hz)
1	1B	5268.47	838.50
2	1T	15758.10	2507.98
3	2B	19007.70	3025.17

Campbell diagram

Evolution of the natural frequencies of the first 3 vibration modes, as a function of rotation speed, for the mesh computed with OpenMCAD^[2]:

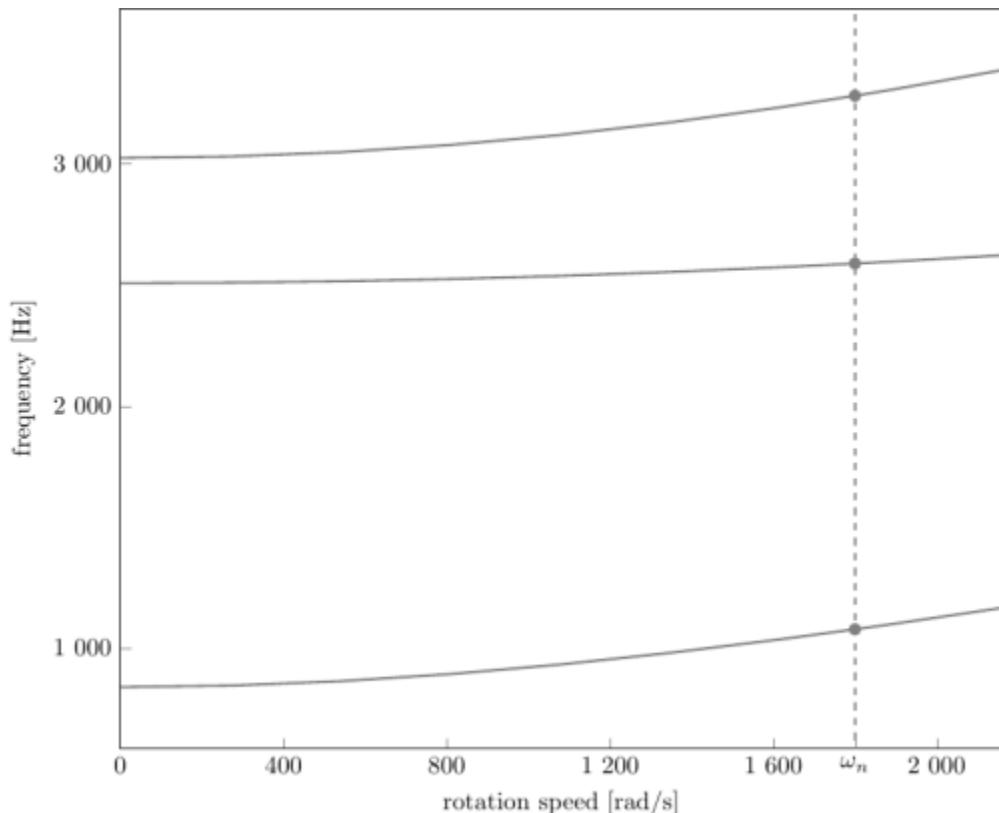

Campbell diagram computed with a linear centrifugal preload, with clamped root (nominal rotation speed $\omega_n = 1800$ rad/s)

- graph (.pdf)
- Campbell data (.csv)

Initial blade

The **initial blade** is defined with in-house LAVA parameters^[5] computed from the reference blade CAD model. The initial blade is usually used as starting point for an optimization process. Its geometry is similar to the one of the reference blade.

Natural frequencies

First three natural frequencies (with clamped root)

- from the whole mesh:


Mode	Type	Natural angular frequency (rad/sec)	Natural frequency (Hz)
1	1B	5331.54	848.54
2	1T	15903.75	2531.16
3	2B	19317.21	3074.43

- from the reduced order model:

Mode	Type	Natural angular frequency (rad/sec)	Natural frequency (Hz)
1	1B	5332.16	848.64
2	1T	15913.55	2532.72
3	2B	19345.55	3078.94

Campbell diagram

Comparison of the evolution of the natural frequencies of the first 3 vibration modes, as a function of rotation speed for the initial and the reference blade:

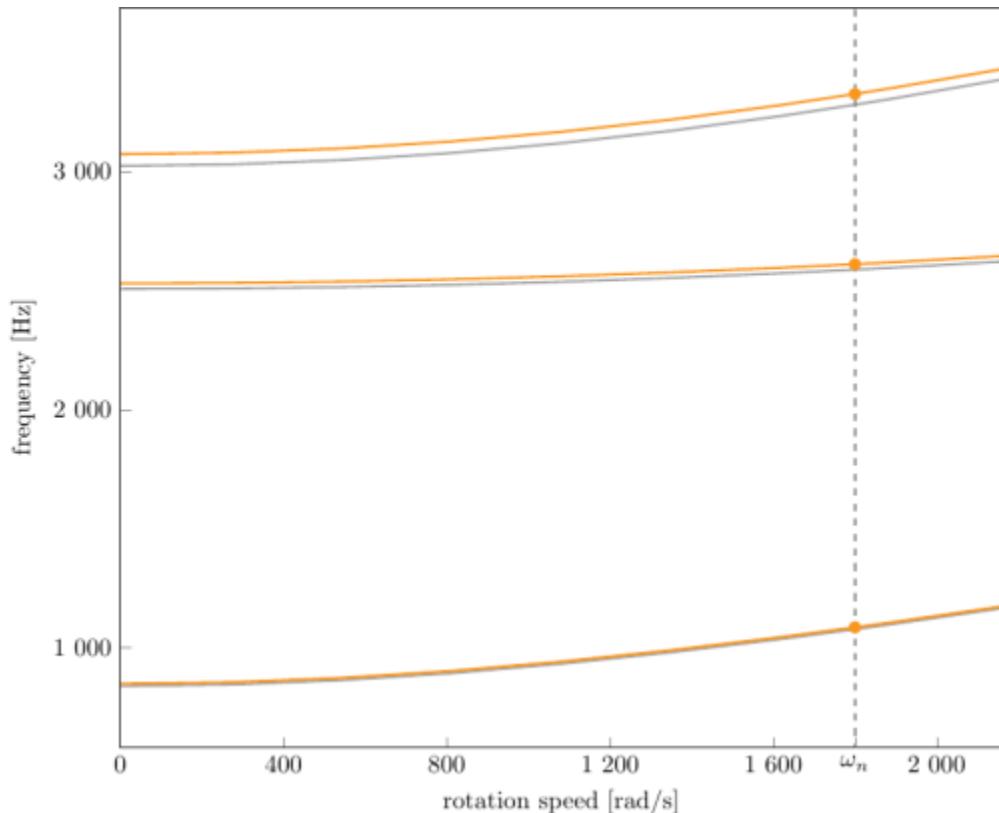

Campbell diagram computed with a linear centrifugal preload, with clamped root (nominal speed $\omega_n = 1800$ rad/s),

initial blade (orange), reference blade (gray)

- graph (.pdf)
- Campbell data (.csv)

Fichiers téléchargeables

x

Libre accès

[lien vers le projet Git](#)

À propos

Le rotor 37 appartient à un programme de recherche visant à étudier une conception de compresseur possédant un grand taux de compression (20:1). Il est donc le rotor du troisième étage de ce compresseur transsonique de huit étages. Parmi ces huit étages, les quatre premiers ont été conçus et testés, ils correspondent aux rotors 35, 36, 37 et 38. Pour plus d'information, voici un lien vers [un rapport de la NASA](#).

- Rapport technique original [\[1\]](#):

```
@TechReport{moore1980design,
  author      = {Moore, R. D. and Reid, L.},
  date        = {1980},
  institution = {NASA Lewis Research Center Cleveland, OH, United States},
  title       = {Performance of Single-Stage Axial-Flow Transonic Compressor With Rotor and Stator Aspect Ratios of 1.19 and 1.26, Respectively, and With Design Pressure Ratio of 2.05},
  number      = {NASA-TP-1659},
  url         = {https://ntrs.nasa.gov/citations/19800012840},
```

- Photographies :

Fig. 1 <https://catalog.archives.gov/id/17468361>Fig. 2 <https://catalog.archives.gov/id/17468389>

```
• @Misc{huebler1977records,
  author  = {Huebler, D.},
  title   = {Rotor 37 and stator 37 assembly. {R}ecords of the {N}ational
             {A}eronautics and {S}pace {A}dministration, 1903 - 2006. {P}hotographs
             relating to agency activities, facilities and personnel, 1973 - 2013},
  note    =
  {\url{https://catalog.archives.gov/id/17468361}}{\url{https://catalog.archives.
  gov/id/17468361}}, 1977 }, % pour Fig. 1
  note    =
  {\url{https://catalog.archives.gov/id/17468389}}{\url{https://catalog.archives.
  gov/id/17468389}}, 1977 }, % pour Fig. 2}
```

Documents utiles

- modèles téléchargeables (lien vers projet Git)
 - rapport technique original de la NASA (.pdf)
 - fichier de paramètres géométriques (.csv), utilisable en entrée de OpenMCAD^[2] pour générer l'aube de référence

Aube de référence

L'**aube de référence** est définie par des profils de type arcs circulaires multiples^[3], donnés dans le rapport technique original de la NASA^[1]. Les modèles associés sont obtenus avec le code en libre accès OpenMCAD^[2].

Géométrie

La géométrie du rotor 37 est décrite dans le [rapport d'origine de la NASA](#) par les tableaux suivants. Les grandeurs sont en centimètres et en degrés.

(a) Rotor 37										
RP	PERCENT SPAN	RADII		BLADE ANGLES			DELTA INC	CONE ANGLE		
		R1	R0	K1C	KTC	KOC				
TIP	0.	25.230	24.506	62.53	62.83	49.98	2.10	-15.233		
1	5.	24.935	24.218	61.66	61.86	49.07	2.39	-14.582		
2	10.	24.597	23.929	60.76	60.86	48.18	2.69	-13.139		
3	15.	24.254	23.641	60.07	60.09	47.34	2.94	-11.768		
4	30.	23.211	22.775	58.48	58.09	44.22	3.40	-7.804		
5	50.	21.761	21.622	56.53	54.49	38.87	4.19	-2.276		
6	70.	20.246	20.458	54.24	50.48	32.37	5.49	3.311		
7	85.	19.030	19.603	52.67	47.60	25.28	6.54	8.010		
8	90.	18.603	19.314	52.37	46.87	22.68	6.83	9.728		
9	95.	18.161	19.026	52.18	46.39	19.75	7.16	11.584		
HUB	100.	17.780	18.738	52.04	46.03	16.75	7.44	12.602		

RP	BLADE THICKNESSES			AXIAL DIMENSIONS			
	TI	TM	TO	ZI	ZMC	ZTC	Z0
TIP	.025	.175	.025	.713	2.430	2.399	3.372
1	.026	.186	.026	.665	2.390	2.372	3.424
2	.028	.199	.028	.615	2.346	2.334	3.475
3	.029	.211	.029	.574	2.304	2.280	3.520
4	.032	.250	.033	.466	2.225	2.094	3.644
5	.037	.303	.038	.317	2.164	1.928	3.822
6	.042	.360	.043	.176	2.069	1.773	4.015
7	.047	.407	.047	.079	2.010	1.733	4.153
8	.048	.425	.049	.048	1.984	1.660	4.198
9	.050	.443	.050	.021	1.957	1.591	4.241
HUB	.051	.458	.051	.000	1.933	1.530	4.283

Caractéristiques aérodynamiques

	unités	valeurs
taux de compression	[-]	2,05
débit massique	[kg/s]	20,2
vitesse en tête	[m/s]	455
solidité en tête	[-]	1,3
allongement	[-]	1,19
nombre d'aubes	[-]	36

	unités	valeurs
vitesse de rotation nominale ω_n	[rad/s]	1800


Propriétés matériau

Le matériau du rotor 37 est un alliage à base de nickel : un acier maraging de grade 200^[4], mais ses caractéristiques ne sont pas fournies dans le rapport de la NASA. Les propriétés considérées sont :


	unité	valeurs
alliage	[-]	18-Ni-200-maraging
module d'Young	[GPa]	180
masse volumique	[kg/m ³]	8000
coefficient de Poisson	[-]	0,3
limite élastique	[GPa]	1,38

Modèle CAO

Le modèle CAO est obtenu avec OpenMCAD^[2].

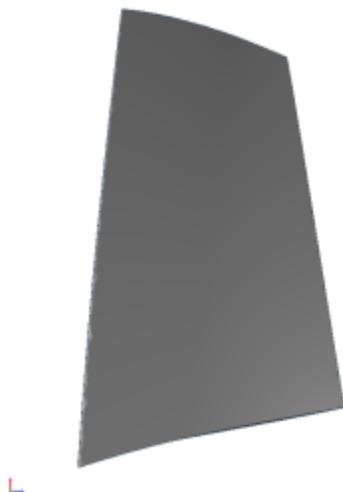

intrados

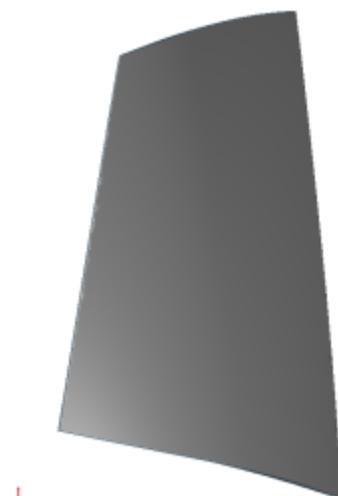

extrados

Fréquences propres

Fréquences des trois premiers modes (noeuds du pied d'aube encastrés) pour le maillage obtenu avec OpenMCAD^[2] :

Mode	Type	Pulsation propre (rad/sec)	Fréquence propre (Hz)
1	1F	5268,47	838,50
2	1T	15758,10	2507,98
3	2F	19007,70	3025,17

Diagramme de Campbell

Évolution des fréquences propres des 3 premiers modes, en fonction de la vitesse de rotation, pour le maillage obtenu avec OpenMCAD^[2]:

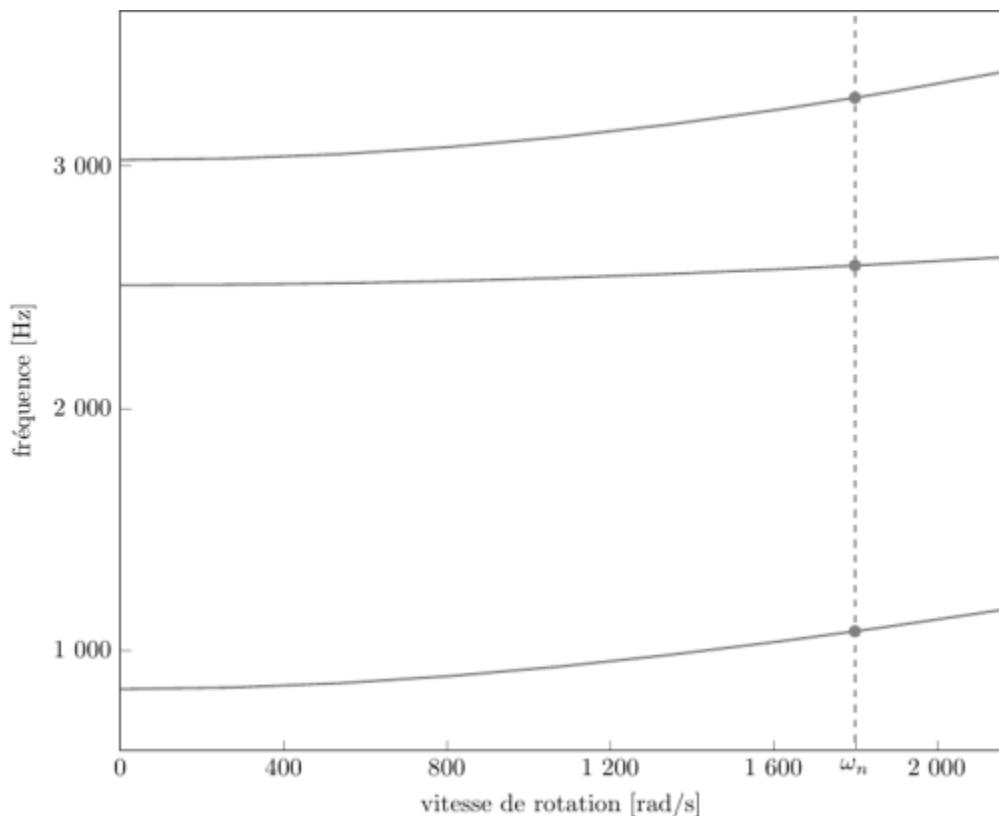


diagramme de Campbell calculé avec une précharge centrifuge linéaire, noeuds du pied d'aube encastrés (vitesse nominale $\omega_n = 1\,800 \text{ rad/s}$)

- graphique (.pdf)
- données du Campbell (.csv)

Aube initiale

L'**aube initiale** est définie par des paramètres spécifiques au LAVA^[5] obtenus à partir du modèle CAO de l'aube de référence. L'aube initiale est classiquement utilisée comme point de départ dans le cadre de procédures d'optimisation; sa géométrie est similaire à celle de l'aube de référence.

Fréquences propres

Fréquences des trois premiers modes (noeuds du pied d'aube encastrés),

- pour le maillage complet :

Mode	Type	Pulsation propre (rad/sec)	Fréquence propre (Hz)
1	1F	5331,54	848,54
2	1T	15903,75	2531,16
3	2F	19317,21	3074,43

- pour le modèle réduit :

Mode	Type	Pulsation propre (rad/sec)	Fréquence propre (Hz)
1	1F	5332,16	848,64
2	1T	15913,55	2532,72
3	2F	19345,55	3078,94

Diagramme de Campbell

Comparaison de l'évolution des fréquences propres des 3 premiers modes, en fonction de la vitesse de rotation, pour l'aube initiale et de référence:

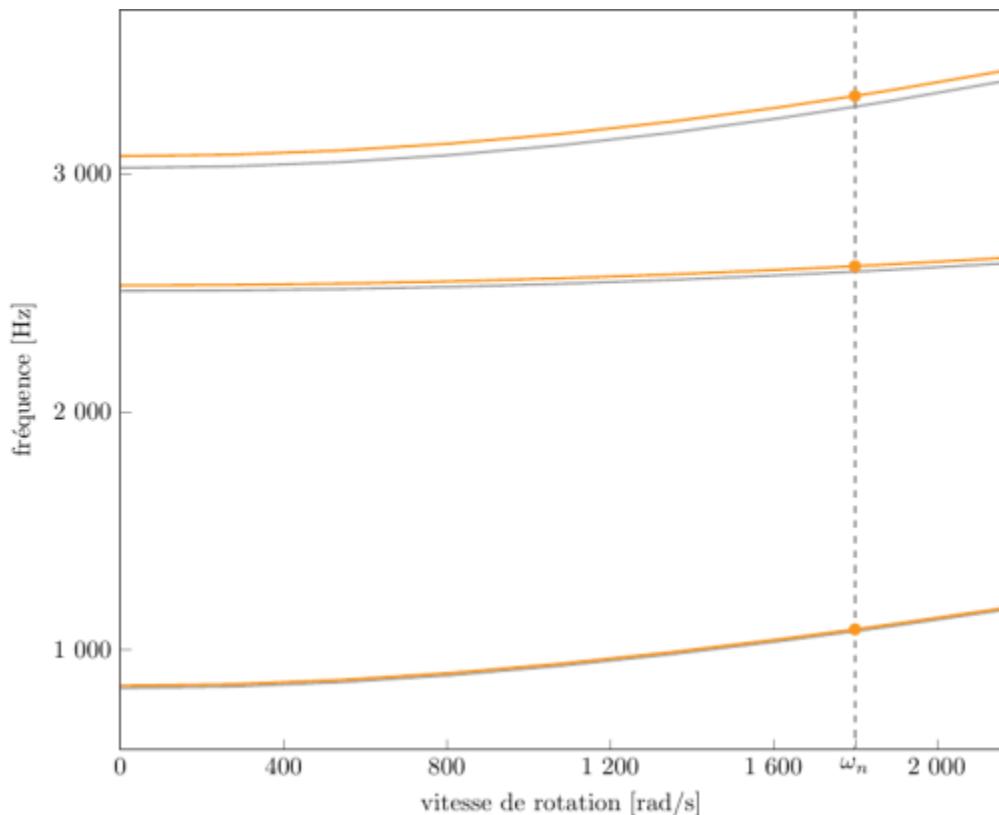


diagramme de Campbell calculé avec une précharge centrifuge linéaire, noeuds du pied d'aube encastrés (vitesse nominale $\omega_n = 1\ 800 \text{ rad/s}$),

aube initiale (orange), aube de référence (grise)

- graphique (.pdf)
- données du Campbell (.csv)

-
1. [a](#), [b](#), [c](#), [d](#) Moore R. D., Reid L. «Performance of Single-Stage Axial-Flow Transonic Compressor With Rotor and Stator Aspect Ratios of 1.19 and 1.26, Respectively, and With Design Pressure Ratio of 2.05 » 1980. [pdf](#)
 2. [a](#), [b](#), [c](#), [d](#), [e](#), [f](#), [g](#), [h](#), [i](#), [j](#) Kojtych S., Batailly A. «OpenMCAD, an open blade generator: from Multiple-Circular-Arc profiles to Computer-Aided Design model» 2022. [open source code](#)
 3. [a](#), [b](#) Crouse *et al.* «A computer program for composing compressor blading from simulated circular-arc elements on conical surfaces » 1969. NASA-TN-D-5437. [pdf](#)
 4. [a](#), [b](#) Reid. «Design and overall performance of four highly loaded, high-speed inlet stages for and advanced high-pressure-ratio core compressor» 1978. [pdf](#)
 5. [a](#), [b](#) Kojtych S. *et al.* «Methodology for the Redesign of Compressor Blades Undergoing Nonlinear Structural Interactions: Application to Blade-Tip/Casing Contacts » 2022. Journal of Engineering for Gas Turbines and Power, Vol. 145, No. 5. [pdf](#)

Document issu de la page wiki:

https://wiki.lava.polymtl.ca/public/modeles/rotor_37/accueil

Dernière mise à jour: **2024/08/07 16:58**